
## PZL (PZ-11) Tiplex Drilling Mud Pump

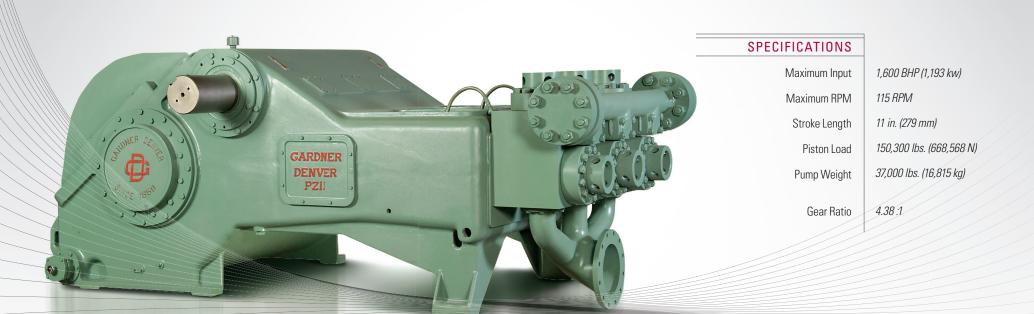

	PISTON CYLINDER  DIAMETER		DISPLACEMENT – DRILLING SERVICE				MAXIMUM PSI			
_			PER REVOLUTION		MAXIMUM FLOW RATE		IVIAAIIVIUW PSI		PUMP RPM	JACKSHAFT RPM
	inch	mm	gallon	liters	GPM	LPM	PSI	bar		
-	8	203	7.18	27.18	826	3126	2989	206		504
	7.5	191	6.31	23.89	726	2747	3401	234		
	7.25	184	5.90	22.32	678	2567	3639	251		
	7	178	5.50	20.81	632	2393	3904	269	115	
	6.5	165	4.74	17.94	545	2064	4527	312		
	6.25	159	4.38	16.59	504	1908	4897	338		
	6	152	4.04	15.29	465	1758	5000	345		
	5.5	140	3.39	12.85	390	1478	5000	345		
	5	127	2.80	10.62	323	1221	5000	345		

Ratings shown are for 5,000 PSI Fluid End Cylinder. For 7,500 PS Fluid End Cylinder, visit www.gardnerdenverpumps.com

Weight: Complete pump with large steel skid - 41,400 pounds.

Ratings are based on 90% mechanical efficiency and 100% volumetric efficiency.

# Gardner Denver

**Pumping Perfected**.

### PZL (PZ-11) Tiplex Drilling Mud Pump



#### **OPTIONAL FEATURES**

- Steel transportation and placement skid for pump only or larger maintenance skid with non-slipping deck
- Centrifugal suction charging pump
- Suction stabilizer and/or discharge damper
- External electric powered lube pump

- Fabricated, log style suction manifold
- Full open valve seats
- Custom packaging available

#### STANDARD FEATURES

- High strength, cast nodular iron power frame, eccentric, connecting rods, and crossheads
- Full roller bearing construction at eccentric mains, jackshift, connecting rods, and crosshead pins
- Heat treated alloy steel, double helical AGMA drive gears
- Double extended jackshift for mounting sheaves or sprockets

- Replaceable bronze crosshead slides
- Heat treated alloy steel, valve over valve, interchangeable fluid end modules
- Hyrdrostatic tested cast steel discharge manifold
- API suction and discharge connections

#### **SPECIFICATIONS**

